




MAXIMACE
easier > faster > stronger >


Industrial Shock Absorbers for the PET Industry


**Ideal for Stretch Rod and Mold Applications on Sidel and
Krones PET machines**

PET-27MX-880

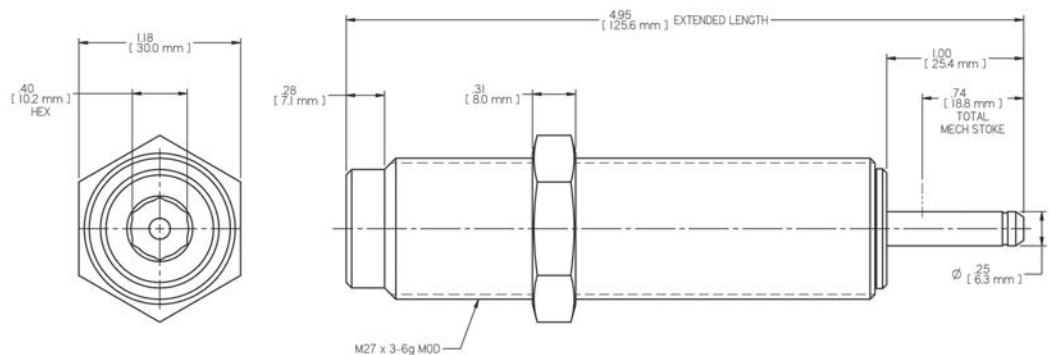


PET-27MX-NB

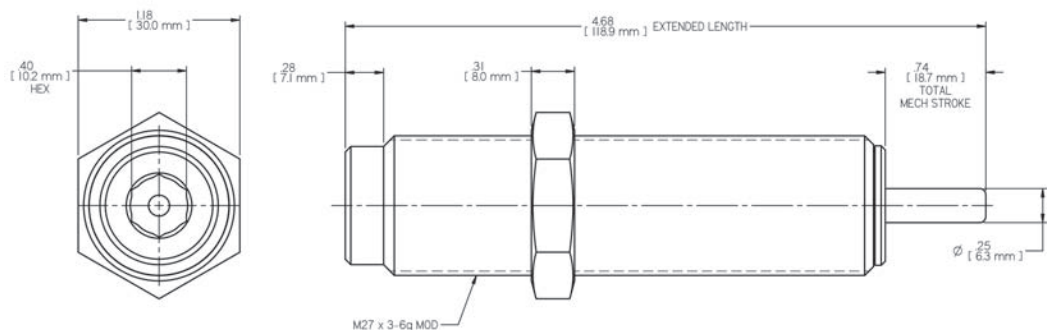

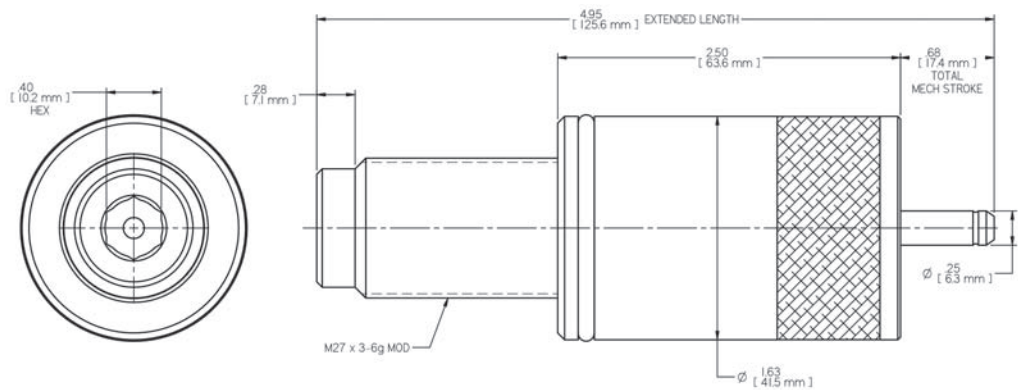

PET-27MX-SBUC

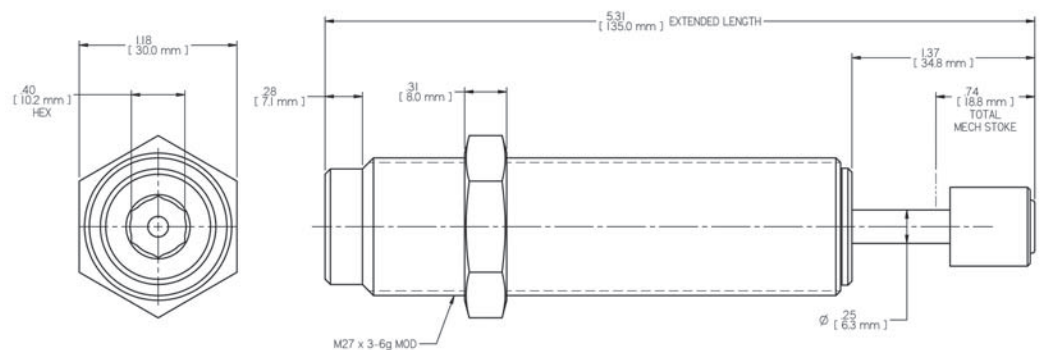

TECHNICAL DATA

E4 Energy per hour: 1.8M in-lbs (203,373 Nm)

Rod return time: 0.10 second

Return force: Initial: 3.8 lbs (1.72 kg)

Compressed: 7.1 lbs (3.22 kg)

Shipping weight: 0.44 lb (.20 kg)

Materials: Aluminum outer tube, chrome plated piston rod

PET Series & Model Number: PET 27M

Effective Weight*: -1 Ultralight -3 Medium

NOMENCLATURE

PET27M 1 - QCM

SERIES MODEL NUMBER

PET 27M

EFFECTIVE WEIGHT

-1 Ultra Light

-3 Medium

MOUNT, BUTTON OPTIONS

- QCM Quick Change Mount
- SBUC Small Button, Urethane Cap
- 880 No Button, Standard Rod
- NB No Button, Short Rod
- When using ACE Shock Stop Holders, you only need to inventory one shock model
- Krones Shock Stop Holder used with -SBUC
- * Additional models available for custom applications.

BIBUS
SUPPORTING YOUR SUCCESS

BIBUS SK, s.r.o
Trnavská 31, SK-94 901 Nitra

Tel.: 037/ 7777 911 Email: sale@bibus.sk
Fax.: 037/ 7777 999 http://www.bibus.sk