


Stromag ACS Cardan Shafts



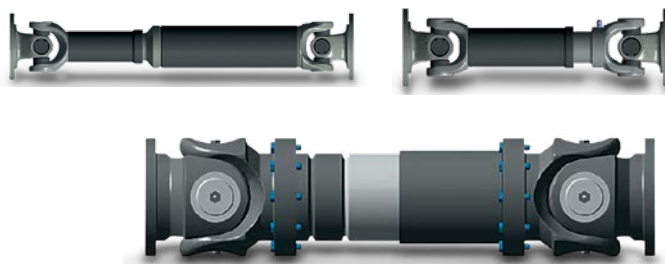

ACS CARDAN SHAFTS

The best choice for coupling two rotating non-aligned shafts in difficult and challenging operating conditions.

The ACS Cardan Shafts range offers an excellent reliability, high service life and low operating costs.

Seven different designs in a large range of sizes allow to provide the optimal shaft for the requested application.


Innovative and optimised construction features provide performance and advantages of no maintenance requirement.

Applications

- Steel cranes
- Gantry cranes
- Travelling cranes

Benefits

- Long service life: closed bearing yokes
- No costs of maintenance: innovative U-joint for no lubrication
- No machine down time: no lubrication requirement
- Higher torque capacity: perfected geometries
- Lower wear: optimised spline
- Maximum weld seam quality: certification DIN ISO 3834-2 and DIN EN 15085-2 CL1
- Highest possible strength and minimum deformation under load
- Excellent operational safety
- Optimally scaled product portfolio

Type	Design	Description
ACS-100		With length compensation
ACS-105		With length compensation in double-flange design
ACS-110		Short couple shaft
ACS-130		Tube shaft without length compensation
ACS-135		Tube shaft without length compensation in double-flange design
ACS-160		Intermediate shaft
ACS-220		Intermediate tube shaft

L1 = compressed length

L2 = maximum possible length compensation

Lw max. = maximum possible working length

Optimal working length = **Lw opt.** = $L1 + \frac{1}{2} L2$




TECHNICAL DATA / DIMENSIONS

Revision number: T10155-01-B Revision date: 05.11.2018

SERIES 1, 2 and 3

Series			1	2					3			
Size			07600	10000	11600	12600	14400	15800	17200	17800	20400	
DESIGN	Bearing Torque Nm		600	1.400	3.000	5.300	6.000	8.800	12.500	17.000	20.000	
	Reversing Fatigue Torque Nm		300	700	1.500	2.300	2.900	4.400	5.100	8.500	11.000	
	Joint Performance Factor Nm		220	660	990	1.780	2.070	2.400	3.500	4.600	6.800	
	Swing Diameter mm		76	100	116	126	144	158	172	178	204	
		L1 min	250	421	451	536	572	630	566	661	746	
		L2 min	40	110	110	110	110	180	110	110	110	
		tube size	50	50 / 76,2	70 / 90	90	100	100	120	120	140	
		L1 min	214	240	290	340	409	400	430	450	480	
		L2 min	15	15	30	40	45	35	40	40	40	
		L1 max	249	420	450	535	571	559	565	660	745	
		L2 max	40	110	110	110	110	110	110	110	110	
		L1 min	190	218	278	309	369	355	400	353	440	
tube size		50	50 / 76,2	70 / 90	90	100	120	120	120	140		
CONNECTIONS (ØD-N-Ød)			75-6-6	90-4-8	100-6-8	120-8-10	150-8-12	150-8-12	180-8-14	180-8-14	180-8-14	
			90-4-8	100-6-8	120-8-8	150-8-12	180-8-14	180-8-14	180-8-16	180-8-16	180-8-16	
				100-8-8	120-8-10	180-8-10		180-8-16	180-10-16	180-10-16	180-10-16	
				120-8-8	150-8-10	180-8-14		180-10-16	225-8-16	225-8-16	225-8-16	
				120-8-10	150-8-12					250-8-18	250-8-18	
			87-4-8	87-4-8	119-4-11,1	146-4-12,7	174,8-8-9,6	174,8-8-9,6	203,2-8-9,6	203,2-8-9,6	203,2-12-11,1	
				96,8-4-9,6	149-4-12,7			203,2-8-9,6	203,2-12-11,1	203,2-12-11,1	244,5-8-16,1	
				119-4-11,1				203,2-12-11,1				
				100-4-8,5	122-4-11	122-4-11	122-4-11	150-4-13	150-4-13	150-4-13	180-4-15	
				122-4-11			150-4-13	180-4-15	180-4-15	180-4-15		

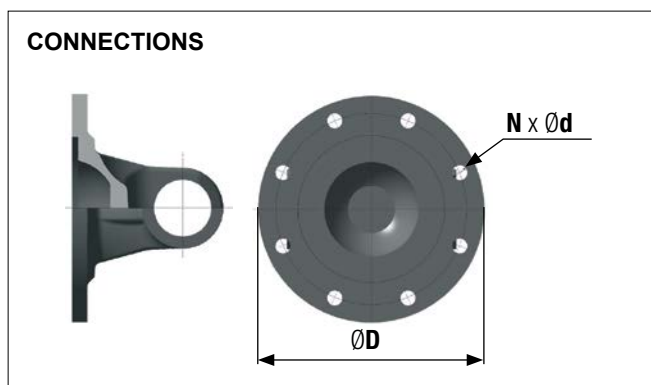

SIME Brakes Industrial Braking Systems

ACS Cardan Shafts


TECHNICAL DATA / DIMENSIONS

Revision number: T10155-01-B Revision date: 05.11.2018

SERIES 4 and 5

Series			4					5			
Size			21500	21510	22580	25080	28580	31510	35000	39000	44000
DESIGN	Bearing Torque Nm		26.000	29.000	45.000	70.000	100.000	143.000	210.000	300.000	500.000
	Reversing Fatigue Torque Nm		13.000	14.500	23.000	35.000	50.000	70.000	100.000	150.000	250.000
	Joint Performance Factor Nm		8.050	8.350	12.050	18.650	26.200	28.140	40.300	56.800	81.500
	Swing Diameter mm		220	220	225	250	285	315	350	390	440
		L1 min	797	775	900	995	1.115	1.205	1.295	1.450	1.660
		L2 min	150	140	110	140	140	140	150	170	190
		tube size	144	150	160 / 170	180	200	219	245	273	325
		L1 min	551	580	585	645	990	980	1.175	1.140	1.300
		L2 min	50	40	40	40	50	100	50	80	70
		L1 max	796	650	899	994	1.114	1.204	1.294	1.449	1.659
		L2 max	150	110	140	140	140	140	150	170	190
		L1 min	506	538	615	680	760	890	950	1.040	1.250
		tube size	144	150	160 / 170	180	200	215	245	273	324
CONNECTIONS (ØD-N-Ød)		DIN	225-8-16	225-8-16	225-8-16	250-8-18	285-8-20	315-8-22	350-10-22	390-10-24	435-10-27
			250-8-18	250-8-18	250-8-18	285-8-20	315-8-22	350-10-22	390-10-24	435-10-27	
			285-8-20	285-8-20	285-8-20	315-8-22					
		DIN with face key (w x k)	225-8-17 (32x9)	225-8-17 (32x9)	225-8-17 (32x9)	250-8-19 (40x12)	285-8-21 (40x15)	315-10-23 (40x15)	350-10-23 (50x16)	390-10-25 (70x18)	435-16-28 (80x20)
				250-8-19 (40x12,5)	250-8-19 (40x12,5)	285-8-21 (40x15)	315-10-23 (40x15)	350-10-23 (50x16)	390-10-25 (70x18)	435-16-28 (80x20)	480-16-31 (90x22,5)
					285-8-21 (40x15)						
		High-serration							350-12-1116	390-12-1118	435-16-1118
									390-12-1118	435-16-1118	480-16-1120



CONNECTIONS - with face KEY

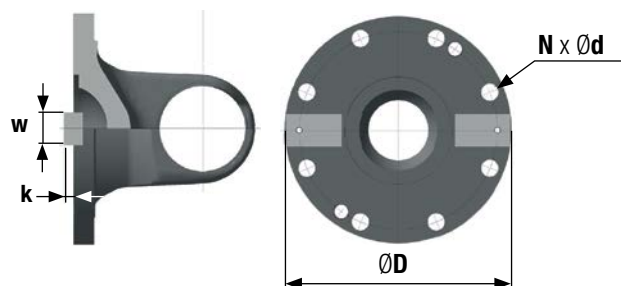

TECHNICAL DATA / DIMENSIONS

Revision number: T10155-01-B Revision date: 05.11.2018

SERIES 5 and 6

Series			5		6			
Size			49000	55000	62000	68000	75000	84000
DESIGN	Bearing Torque	Nm	700.000	1.000.000	1.250.000	1.950.000	2.650.000	3.900.000
	Reversing Fatigue Torque	Nm	345.000	500.000	625.000	950.000	1.350.000	1.850.000
	Joint Performance Factor	Nm	112.000	154.000	210.000	320.000	750.000	2.230.000
	Swing Diameter	mm	490	550	620	680	750	840
		L1 min	1.810	1.965	2.240			
		L2 min	190	240	250			
		tube size	351	402	445			
		L1 min	1.300	1.770	2.050			
		L2 min	50	55	55			
		L1 max	1.809	1.964	2.239			
		L2 max	190	240	250			
		L1 min	1.360	1.480	1.690			
		tube size	355	406	445			
		L1 min				3.250	4.000	4.250
		L2 min				250	250	250
		tube size				559	609	660
		L1 min				1.950	2.400	2.700
		tube size				559	609	660
CONNECTION (ØD-N-Ød)		DIN with face key (w x k)	480-16-31 (90x22,5)	550-16-31 (100x22,5)	620-16-38 (100x25)			
			550-16-31 (100x22,5)	620-16-38 (100x25)				
		High- serration	480-16-1120	550-11-1122	620-6	680-24-33	750-24-33	840-24-38
			550-16-24	620-24-26	680-24-33			

Stromag Facilities

Europe

Germany

Hansastraße 120
59425 Unna - Germany
+49 (0) 23 03 102 0
Clutches & Brakes, Couplings,
Geared Cam Limit Switches, Discs,
Wind Brakes

Dessauer Str. 10
06844 Dessau-Roßlau - Germany
+49 (0) 340 2190 0

Electromagnetic Clutches & Brakes

France

Avenue de l'Europe
18150 La Guerche sur L'Aubois - France
+33 (0)2 48 80 72 72

Disc Brakes & Drum Brakes

Great Britain

Amphill Road
Bedford, MK42 9RD - UK
+44 (0)1234 324347

Electromagnetic Clutches & Brakes,
Industrial Caliper Brakes

North America

USA

31 Industrial Park Road
New Hartford, CT 06057 - USA
860-238-4783

Electromagnetic Clutches & Brakes

300 Indiana Highway 212
Michigan City, IN 46360 - USA
219-874-5248

Couplings

2800 Fisher Rd.
Wichita Falls, TX 76302 - USA
940-723-3400

Geared Cam Limit Switches,
Industrial Caliper & Drum Brakes

South America

Brasil

Avenida João Paulo Ablas, 2970
Jardim da Glória, Cotia - SP,
06711-250 - Brasil
+55 (11) 4615-6300

Flexible Couplings, Bearing
Isolators, and Coupling Guards

Asia Pacific

China

T40B -5, No. 1765 Chuan Qiao Road
Pudong 201206, Shanghai - China
Tel +86 21-60580600

Clutches & Brakes, Electromagnetic
Clutches & Brakes, Couplings, Industrial
Caliper & Drum Brakes, Discs,
Cam Limit Switches, Wind Brakes

India

Gat No.: 448/14, Shinde Vasti, Nighoje
Tal Khed, Pune- 410 501
+91 2135 622100

Clutches & Brakes, Electromagnetic
Clutches & Brakes, Couplings, Industrial
Caliper & Drum Brakes, Discs,
Cam Limit Switches, Wind Brakes

The Brands of Altra Motion

Couplings

Ameridrives
www.ameridrives.com

Bibby Turboflex
www.bibbyturboflex.com

Guardian Couplings
www.guardiancouplings.com

Huco
www.huco.com

Lamiflex Couplings
www.lamiflexcouplings.com

Stromag
www.stromag.com

TB Woods
www.tbwoods.com

Linear Systems

Thomson
www.thomsonlinear.com

Geared Cam Limit Switches

Stromag
www.stromag.com

Engineered Bearing Assemblies

Kilian
www.kilianbearings.com

Electric Clutches & Brakes

Matrix
www.matrix-international.com

Stromag
www.stromag.com

Warner Electric
www.warnerelectric.com

Deltran
www.thomsonlinear.com

Belted Drives

TB Wood's
www.tbwoods.com

Heavy Duty Clutches & Brakes

Twiflex
www.twiflex.com

Stromag
www.stromag.com

Svendborg Brakes
www.svendborg-brakes.com

Wichita Clutch
www.wichitaclutch.com

Gearing & Specialty Components

Bauer Gear Motor
www.bauergears.com

Boston Gear
www.bostongear.com

Delevan
www.delevan.com

Delroyd Worm Gear
www.delroyd.com

Nuttall Gear
www.nuttallgear.com

Engine Braking Systems

Jacobs Vehicle Systems
www.jacobsvehiclesystems.com

Precision Motors & Automation

Kollmorgen
www.kollmorgen.com

Miniature Motors

Portescap
www.portescap.com

Overrunning Clutches

Formsprag Clutch
www.formsprag.com

Marland Clutch
www.marland.com

Stieber
www.stieberclutch.com

Neither the accuracy nor completeness of the information contained in this publication is guaranteed by the company and may be subject to change in its sole discretion. The operating and performance characteristics of these products may vary depending on the application, installation, operating conditions and environmental factors. The company's terms and conditions of sale can be viewed at <http://www.altramotion.com/terms-and-conditions/sales-terms-and-conditions>. These terms and conditions apply to any person who may buy, acquire or use a product referred to herein, including any person who buys from a licensed distributor of these branded products.

©2019 by Stromag LLC. All rights reserved. All trademarks in this publication are the sole and exclusive property of Stromag LLC or one of its affiliated companies.