


DXJ5


ELECTRO-HYDRAULIC SERVOVALVE WITH INTEGRATED ELECTRONICS SERIES 10

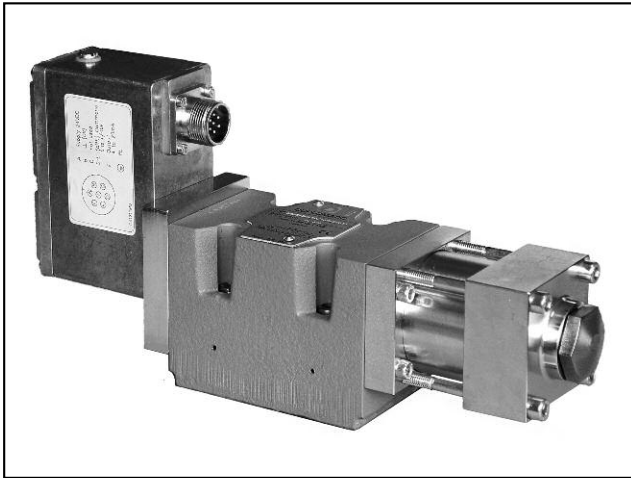


SUBPLATE MOUNTING ISO 4401-05

p max 350 bar
Q max (see performances table)

MOUNTING SURFACE

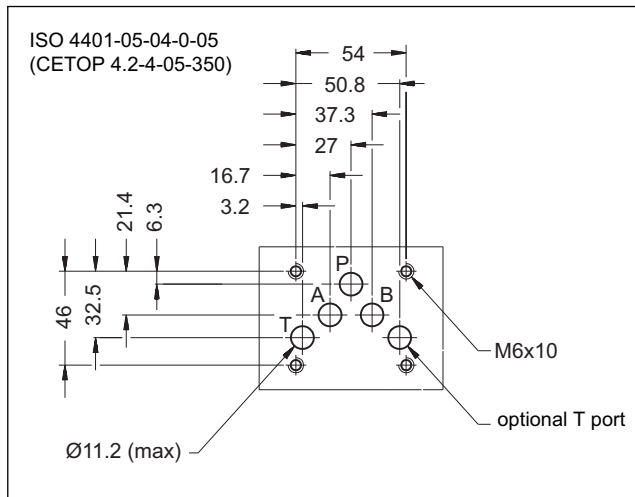

OPERATING PRINCIPLE

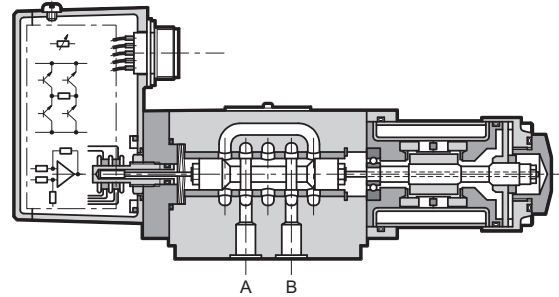

— The DXJ5 is a four-way servo-proportional valve where the spool moves inside a sleeve. This valve has a direct drive with a linear force motor resulting in high dynamic performances independent of system pressure. A linear transducer (LVDT) with closed loop controls the spool position, ensuring high precision and repeatability.

PERFORMANCES (with mineral oil of viscosity 36 cSt at 50°C)


Maximum operating pressure Ports P - A - B Port T	bar	350 50
Rated flow Q nom (with Δp 70 bar P - T)	l/min	60 + 100
Null leakage flow (with $p=140$ bar)	l/min	$\leq 3\%$ of Q nom
Hysteresis	% In	< 0,2
Threshold	% In	< 0,1
Thermal drift (with $\Delta T= 50^\circ\text{C}$)	% In	< 1,5
Response time	ms	≤ 20
Vibration on the three axes	g	30
Electric features	see paragraph 3	
Protection degree according IEC EN 60529	IP65	
Ambient temperature range	$^\circ\text{C}$	-20 / +60
Fluid temperature range	$^\circ\text{C}$	-20 / +80
Fluid viscosity range	cSt	5 + 400
Fluid contamination degree	according to ISO 4406:1999 class 17/15/12 (16/14/11 for longer life)	
Recommended viscosity	cSt	25
Mass	kg	6,3

— It is available in four different flow rate control ranges up to 100 l/min, with spools with zero overlap and a ISO 4401 mounting surface.


— The valve is featured by integrated electronic based on SMD technology which ensures standard regulations and simplifies the electric wiring. The unit does not require any adjustment other than the possible electronic regulation of the zero.

— Suitable for control applications with closed loop of position, velocity and pressure. With a loss of power or with a zero reference signal, the spool goes automatically at rest-position. In this position the valve has a minimum leakage, depending on the operating pressure (see the performances table).

HYDRAULIC SYMBOL

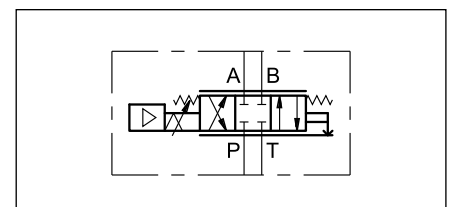


1 - IDENTIFICATION CODE

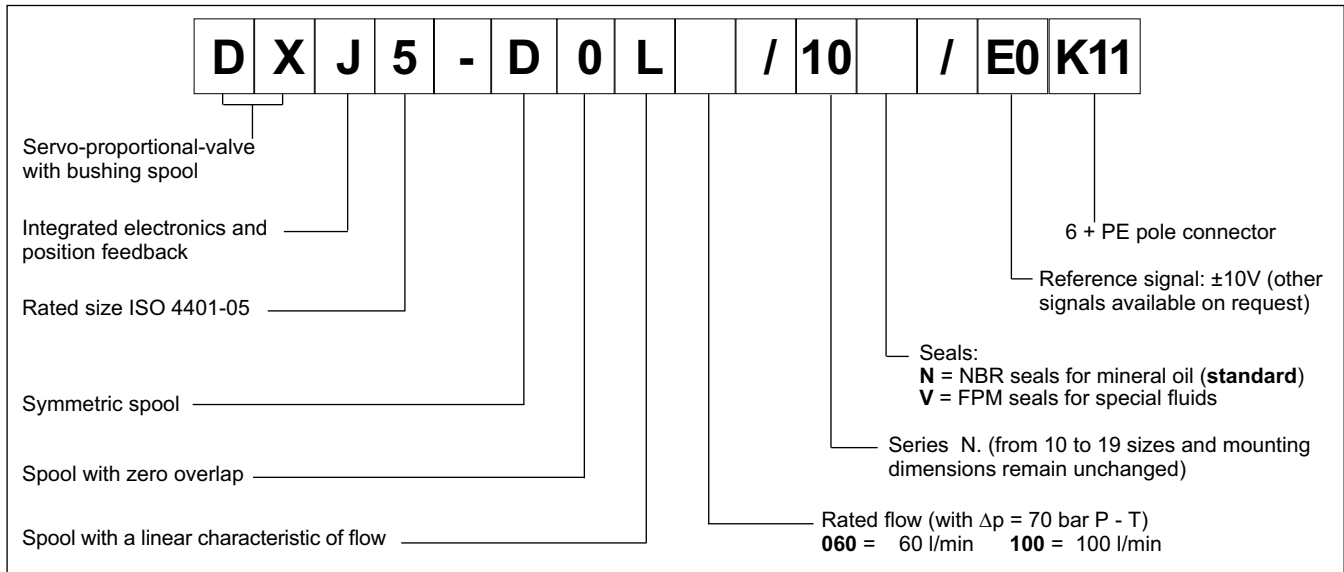


2 - CHARACTERISTIC CURVES (obtained with mineral oil with viscosity of 36 cSt at 50°C)

REFERENCE / FLOW RATE CURVE

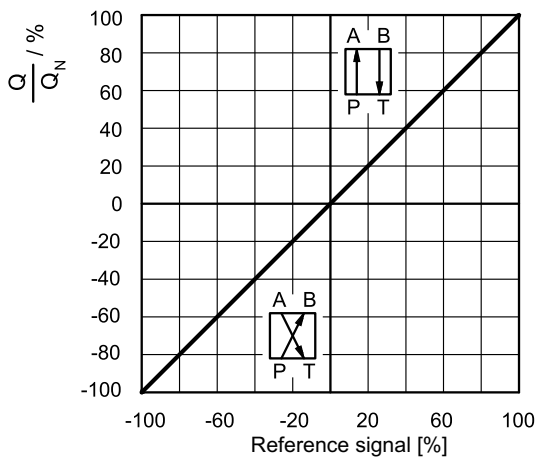

FLOW RATE CURVE ACCORDING TO ΔP

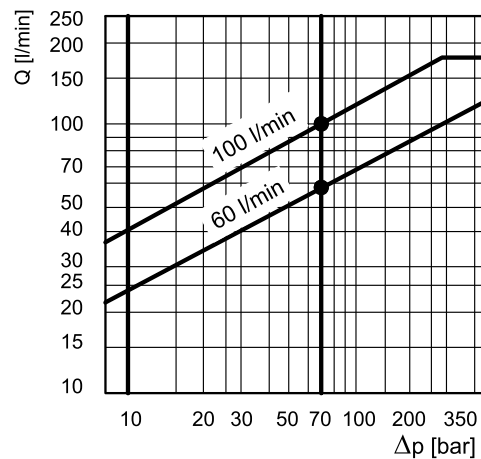


Typical flow rate curves at constant $\Delta p = 70$ bar P-T according to the reference signal.

NOTE: with positive reference signal connected to pin D the valve regulates P - A / B - T.


The diagram states the maximum valve controlled flow rate according to the pressure drop between the P and T ports.

PRESSURE GAIN

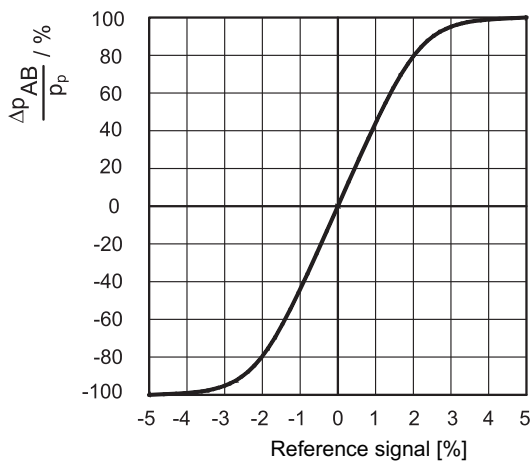


The diagram on the left shows the valve pressure gain, expressed as % of the ratio between the port pressure variation in A or B (Δp_{AB}) and the P system pressure, according to the reference signal. Practically, the pressure gain states the valve reaction towards external disturbances aimed at changing the actuator position.

STEP RESPONSE

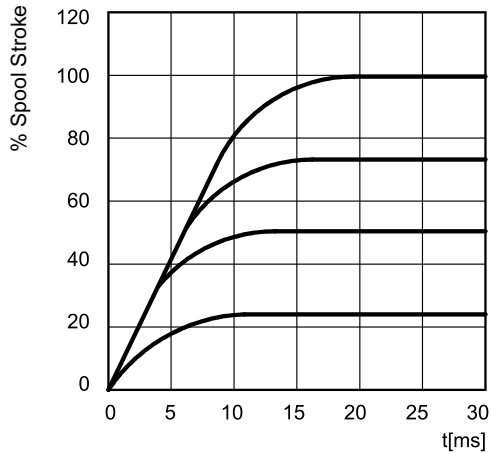


FREQUENCY RESPONSE

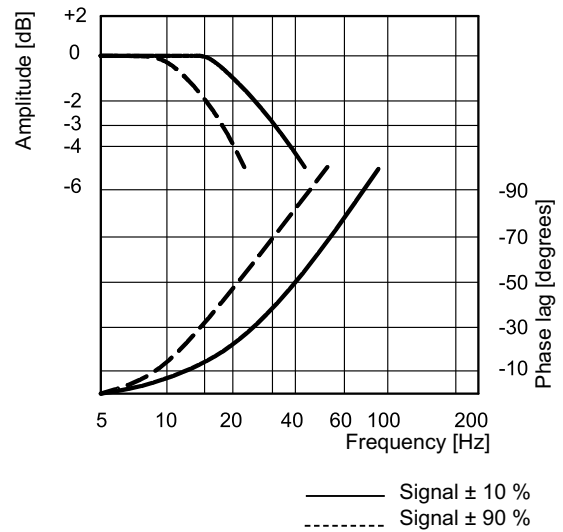

3 - ELECTRICAL FEATURES


CONNECTION WIRING

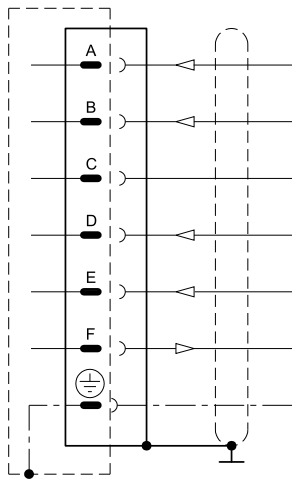

Pin	Values	Function	NOTES
A	24 VDC	Supply	From 19 to 32 VDC $I_{A \text{ MAX.}} = 2,2 \text{ A}$
B	0 V	Signal ground	0 V
C	----	Not used	----
D	$\pm 10 \text{ V}$	Input rated command	$R_e = 10 \text{ k}\Omega$ (see NOTE 1)
E	0 V	Input rated command	----
F	4 ÷ 20 mA	Spool position	$R_L = \text{from } 300 \text{ to } 500 \Omega$ (see NOTE 2)
PE	----	Protective earth	----

NOTE 1: The input stage is a differential amplifier. With positive reference signal connected to pin D, valve opening P - A e B - T is achieved. With a zero reference signal the spool is in centred position. The spool stroke is proportional to $U_D - U_E$. If only one command signal is available (single-end), pin E must be connected to pin B (0V ground).

NOTE 2: The spool position value can be measured at pin F (see diagram right). The position signal output goes from 4 to 20 mA. The centered position is at 12 mA, while 20 mA, corresponds to 100% valve opening P - A and B - T. This monitoring allows to detect a cable break when $I_F = 0V$.

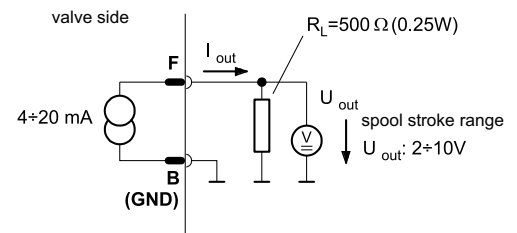

General requirements:

- External fuse = 2,5 A
- Minimum cross-section of all leads $\approx 0,75 \text{ mm}^2$
- When making electric connections to the valve (shield, protective earth) appropriate measures must be taken to ensure that locally different earth potentials do not results in excessive ground currents.
- The differential and the spool position signal lines must be connected to the mating connector housing at valve side and to the 0V (signal ground) at cabinet side.
- **EMC:** meets the requirements of EN 55011:1998, class B, and the immunity regulation according to EN 61000-6-2:1998



BIBUS SK, s.r.o
Trnavská 31, SK-94 901 Nitra

Tel.: 037/ 7777 911 Email: sale@bibus.sk
Fax.: 037/ 7777 999 http://www.bibus.sk


DXJ5
SERIES 10

4 • HYDRAULIC FLUIDS


Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals. For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics. The fluid must be preserved in its physical and chemical characteristics.

5 • INSTALLATION

The DXJ5 valve can be installed in any position without impairing its correct operation. The valve is fixed by means of screws on a flat surface with planarity between 0,01 mm over 100 mm and roughness $R_a < 0,8 \mu\text{m}$. If the minimum values are not observed, the fluid can easily leak between the valve and the mounting surface. While mounting pay attention to the environment and valve cleanliness.

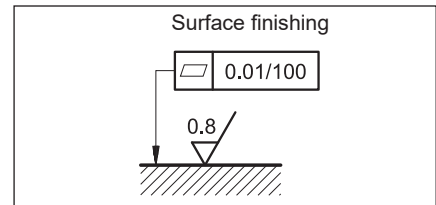

7 • OVERALL AND MOUNTING DIMENSIONS

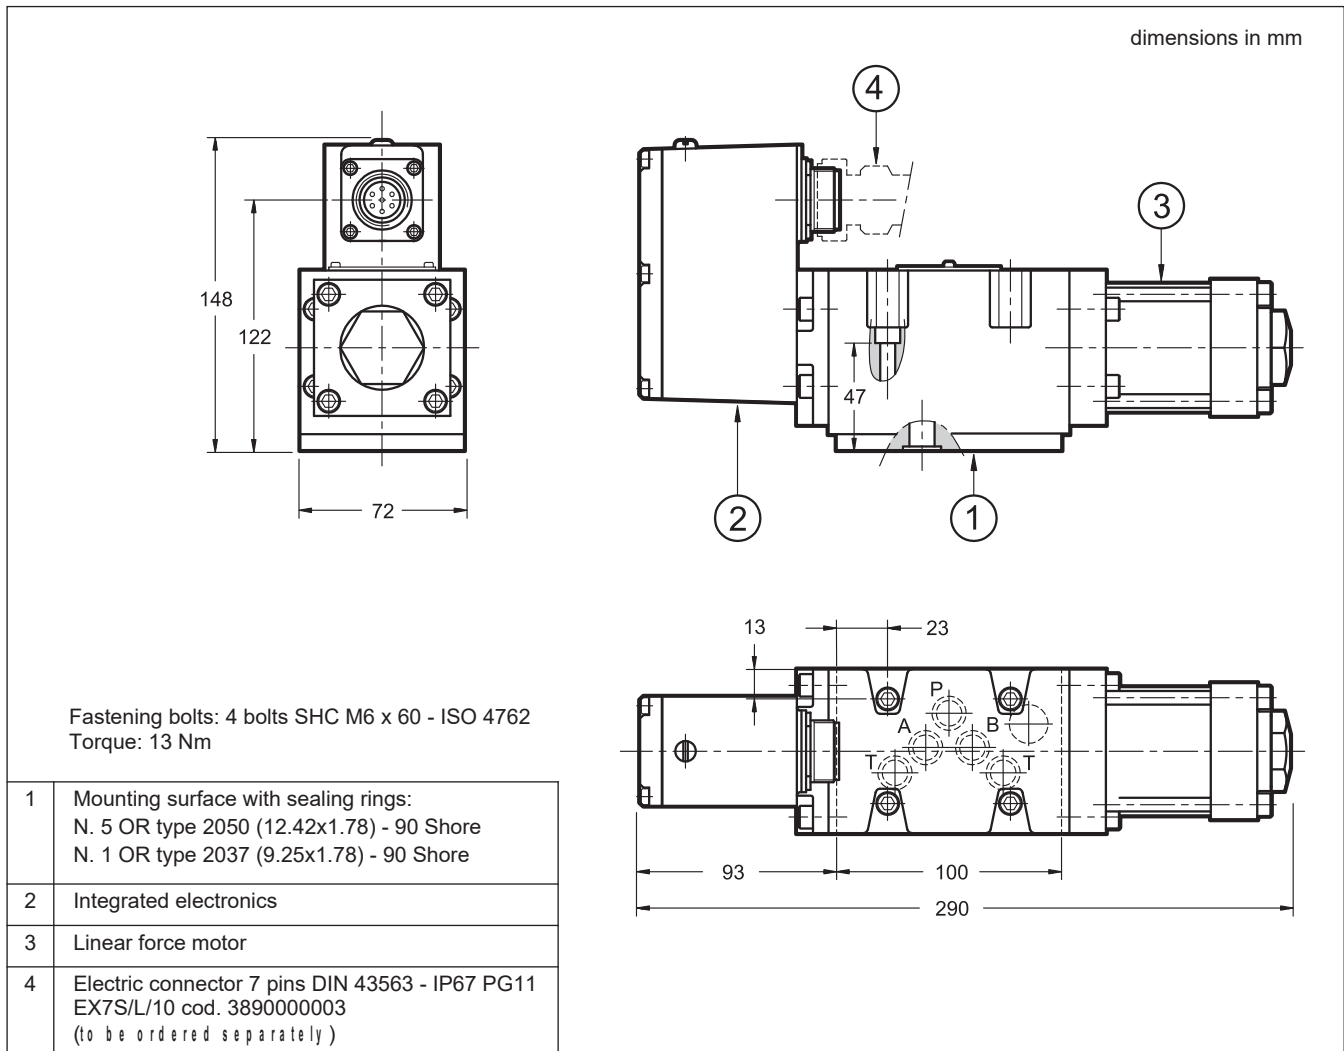

DIPLOMATIC MS S.p.A.

via M. Re Depaolini 24 • 20015 PARABIAGO (MI) • ITALY
tel. +39 0331.895.111 • www.duplomatic.com • e-mail: sales.exp@duplomatic.com