


## Screw-in Cartridge Proportional Flow Control Valve

### SF32P-C3/H

1-1/16-12 UN • inlet  $Q_{max}$  100 l/min (26 GPM) / regulated  $Q_{max}$  60 l/min (16 GPM) •  $p_{max}$  350 bar (5100 PSI)

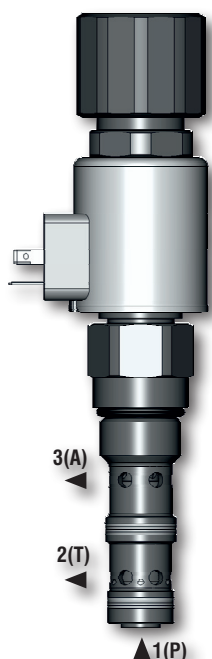

#### Technical Features

- › Proportional flow control operated by solenoid, realized by smooth regulation of flow cross section
- › Possible remote flow control by electric command signal
- › Pressure drop stabilisation with 3-way pressure compensator
- › Regulated volumetric flow independent of load change on an actuator and input pressure fluctuation
- › A and T may be fully pressurized up to 350 bar
- › The 3-way pressure compensator can be changed into 2-way compensator by closing port 2 in the block
- › Three types of connector for electric supply of coils available
- › Additional protection of electronic control unit by incorporating a quenching diode into the connector
- › Manual opening of throttle spool by manual override
- › Surface of the valve is zinc coated with corrosion protection 520 h in NSS acc. to ISO 9227


#### Functional Description

Screw-in cartridge proportional flow control valve with 3-way pressure compensator. The valve is designed to control the speed hydraulic cylinder or hydraulic motor in applications where minimal speed as load or pump supply pressures change. When port 2 is connected to tank, the valve acts as a bypass and the excess fluid is discharged through port 2 back to the tank. Proportional flow control operated by solenoid, is realized by smooth regulation of flow cross section. The flow rate smoothly increases with the increasing command signal, current flowing through the coil winding.

When the port 2 is closed, the valve changes its function into flow control valve with 2-way pressure compensator and the pressure drop is controlled by fluid flow throttling at the edge of compensator spool.

Under the condition that the bypass port (2T) is open, the maximum input flow 100 l/min (26.4 GPM) from the pump (1P) is divided into the maximum regulated flow 60 l/min (15.9 GPM) to the actuator (3A) and the flow 40 l/min (10.6 GPM) into the tank (2T).

#### Technical Data

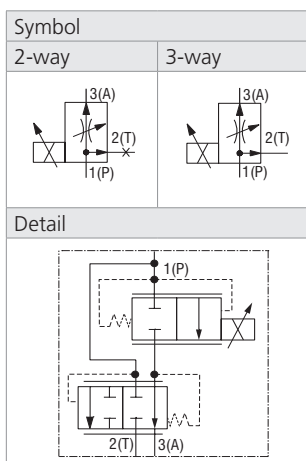


Valve size / Cartridge cavity		1-1/16-12 UN-2A / C3 (C-12-3)	
Max. inlet flow (port 1)	l/min (GPM)	100 (26.4)	
Regulated flow	l/min (GPM)	0 ... 60 (0 ... 15.9)	
Max. operating pressure in all ports	bar (PSI)	350 (5080)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +80 (-22 ... +176)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +80 (-4 ... +176)	
Ambient temperature range	°C (°F)	-30 ... +80 (-22 ... +176)	
Hysteresis	%	< 8	
Weight	kg (lbs)	1.17 (2.58)	
Solenoid data		Type	
Supply voltage	V	12 DC	24 DC
Max. current	A	2.5	1.0
Rated resistance at 20 °C (68 °F)	Ω	2.33 ± 5 %	13.4 ± 5 %
Duty cycle	%	100	
Optimal PWM frequency	Hz	120	
Quenching diode		BZW06-19B	BZW06-33B
Enclosure type acc. to EN 60529**		IP65 / IP67 / IP69K	
	Data Sheet	Type	
General information	GI_0060	Product and operating conditions	
Coil types	C 8007	C22B	
Valve bodies	In-line mounted	SB_0018	SB-C3*
	Sandwich mounted	SB-04(06)_0028	SB-*C3* (only for size 10)
Cavity details / Form tools	SMT_0019	SMT-C3*	
Spare parts	SP_8010		


\*\*The indicated IP protection level is only reached with a properly mounted connector.

#### Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

##### Regulated flow at port A related to control signal

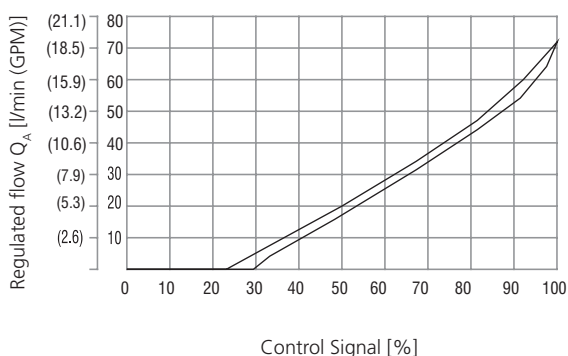


##### Pressure drop $\Delta p - P \rightarrow T$ , 0% of control current

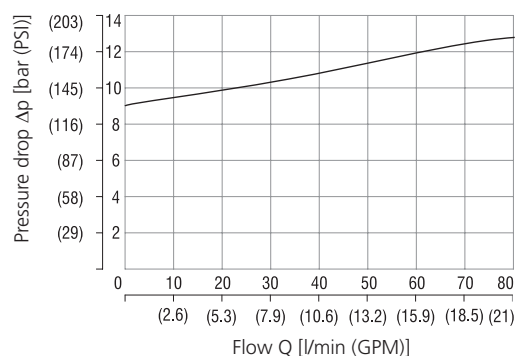


Characteristics measured at  $v = 32 \text{ mm}^2/\text{s}$  (156 SUS)

Regulated flow at port A - related to load pressure  
2-way pressure compensator (port T to the tank is closed)

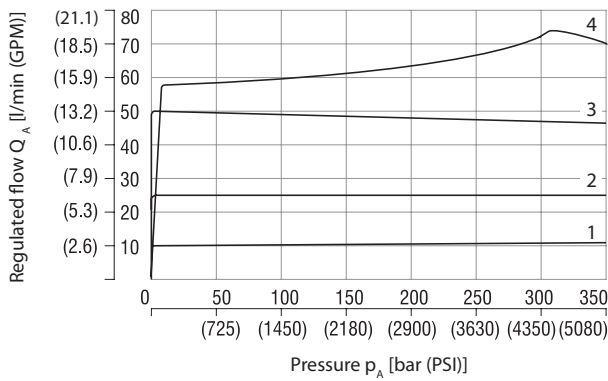


Current control signal	1	2	3	4
	40 %	60 %	80 %	100 %

Regulated flow at port A - related to load pressure  
3-way pressure compensator (port T to the tank is open)

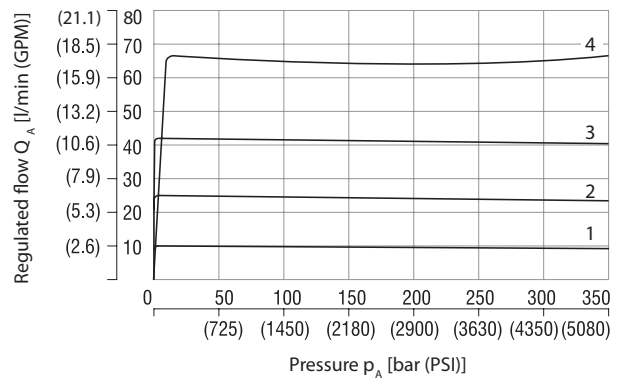


Current control signal	1	2	3	4
	40 %	60 %	80 %	100 %


Dimensions in millimeters (inches)

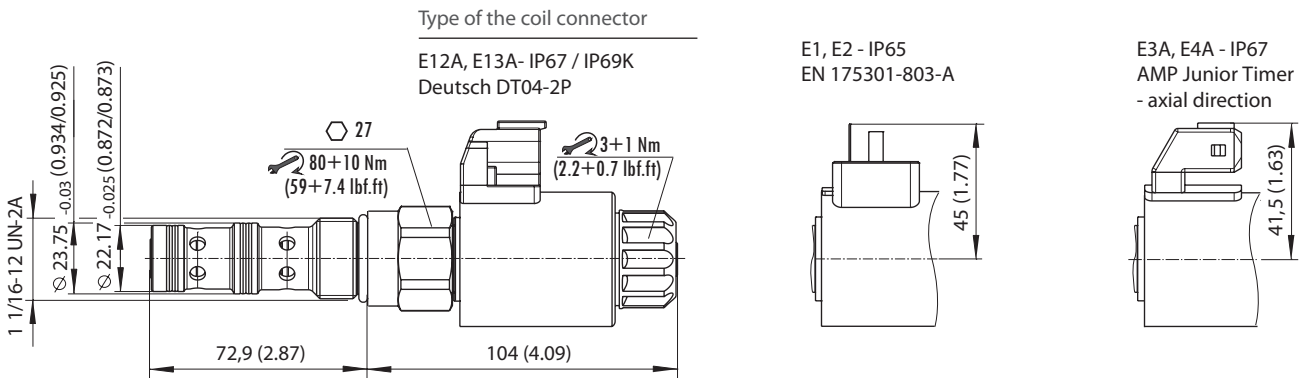

Manual Override in millimeters (inches)

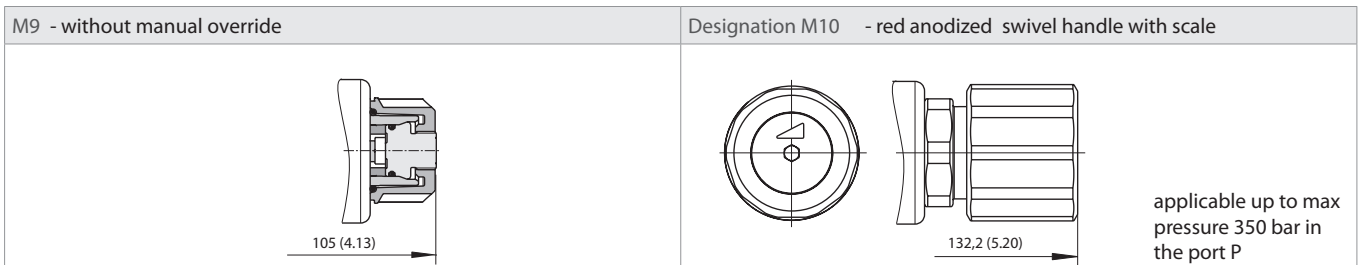

Ordering Code

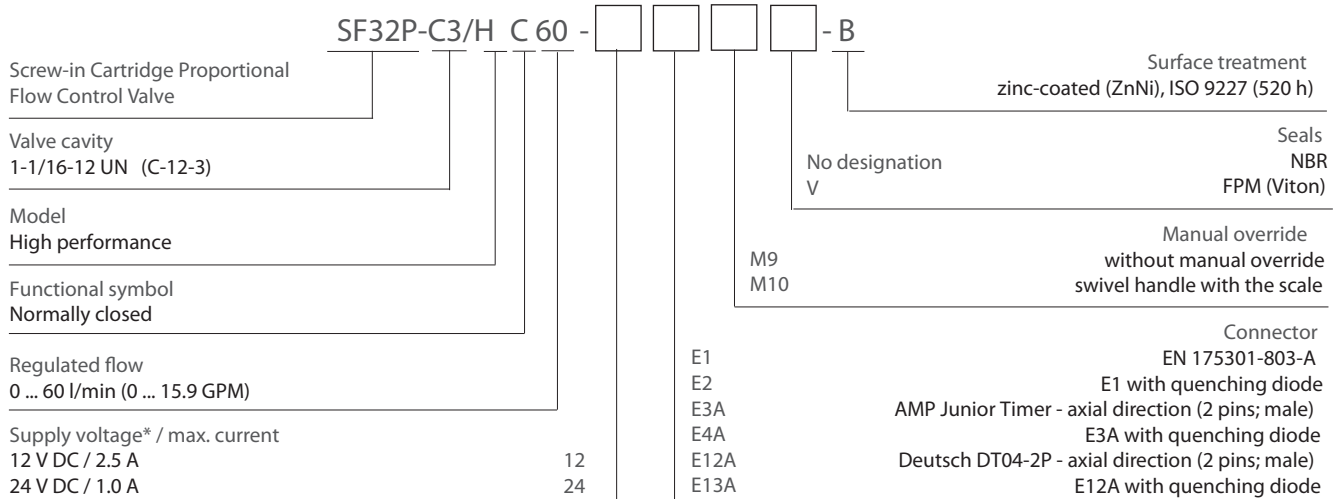

\*For other supply voltages of coils see data sheet C\_8007.